
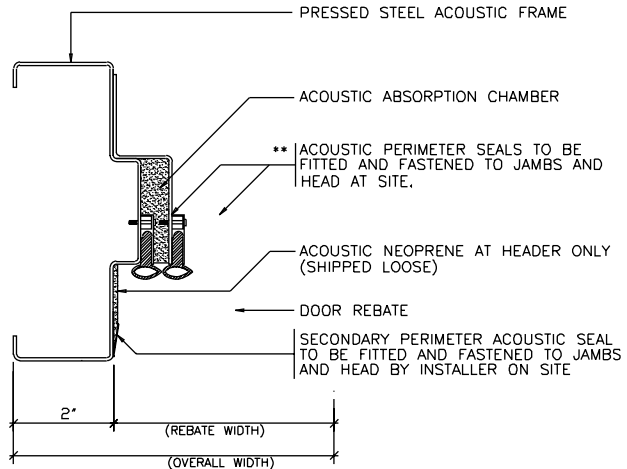
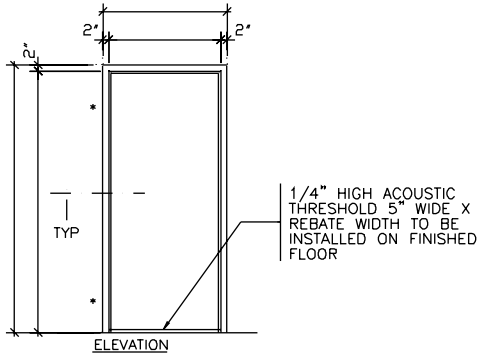


NOTE: THESE DRAWINGS ARE ISSUED FOR GENERAL INFORMATION ONLY AND ARE NOT INTENDED FOR MODIFICATION. FOR FURTHER INFORMATION PLEASE CONSULT OUR SALES OR ENGINEERING DEPARTMENTS.

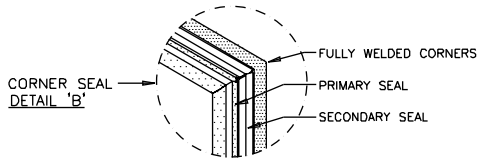

NOTES:

- * FRAME TO BE PREPARED FOR ___ PR CAM-LIFT HINGES.
- ** ACOUSTIC SEALS DIMINISH THE FRAME CLEAR OPENING SIZE AS FOLLOWS:
 - REBATE WIDTH LESS 2 1/2" (63.5mm) = CLEAR OPENING WIDTH
 - REBATE HEIGHT LESS 1 1/4" (31.75mm) = CLEAR OPENING HEIGHT.
 - FRAME MUST BE INSTALLED AT FINISHED FLOOR HEIGHT (DO NOT EMBED JAMB IN FLOOR)

TYPICAL JAMB SECTION